

220-240V
50/60 HzIP
20

LED



Suspended decorative luminaire for LED light sources. The luminaire consists of 2 cubes, appearing in 3 colors with a different surface finish. Possibility of connecting power from an adjacent luminaire. An innovative, easy way to mount and level the luminaires.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)

Body: plastic

Colour: gray, dark gray, black

Diffuser: opal plexiglass (PLX)

ELECTRICAL DATA

Power supply efficiency: 84%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED, DALI

Electrical connection: max 3x0,75 mm² wire, max 5x0,75 mm² wire

OPTICAL DATA

Light distribution: rotationally-symmetric

Way of lighting: direct

GENERAL DATA

Lifetime (L70B50): 65 000 h

Lifetime (L80B10): 40 000 h

Lifetime (TM21 L90B10): 20 000 h

Additional information: Possibility of connecting power from an adjacent luminaire.

Other remarks: wire terminated with connector attached to the luminaire

Warranty: 5 years

Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques, airports



Code	Colour	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
Surface finish: matt							
200132.XL01.111	gray	9	700	78	3000	80	0 ... +35
200132.XL02.111	gray	9	700	78	4000	80	0 ... +35
200139.XL01.111	dark gray	9	700	78	3000	80	0 ... +35
200139.XL02.111	dark gray	9	700	78	4000	80	0 ... +35
200133.XL01.111	black	9	700	78	3000	80	0 ... +35
200133.XL02.111	black	9	700	78	4000	80	0 ... +35
Surface finish: gloss							
200133.XL01.122	black	9	700	78	3000	80	0 ... +35
200133.XL02.122	black	9	700	78	4000	80	0 ... +35


200132.	<input type="checkbox"/>	L01.111
		Type of equipment
	5	ED
	3	DALI

Designed by LUG Design Team


Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info available on our website www.flashdq.com

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W H	Net weight [kg]
Surface finish: matt			
200132.XL01.111	272 272 140	272 272 140	1.6
200132.XL02.111	272 272 140	272 272 140	1.6
200139.XL01.111	272 272 140	272 272 140	1.6
200139.XL02.111	272 272 140	272 272 140	1.6
200133.XL01.111	272 272 140	272 272 140	1.6
200133.XL02.111	272 272 140	272 272 140	1.6
Surface finish: gloss			
200133.XL01.122	272 272 140	272 272 140	1.6
200133.XL02.122	272 272 140	272 272 140	1.6

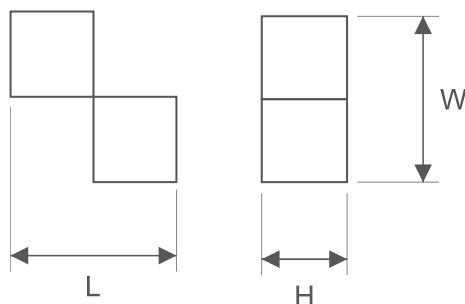

OTHER PICTURES

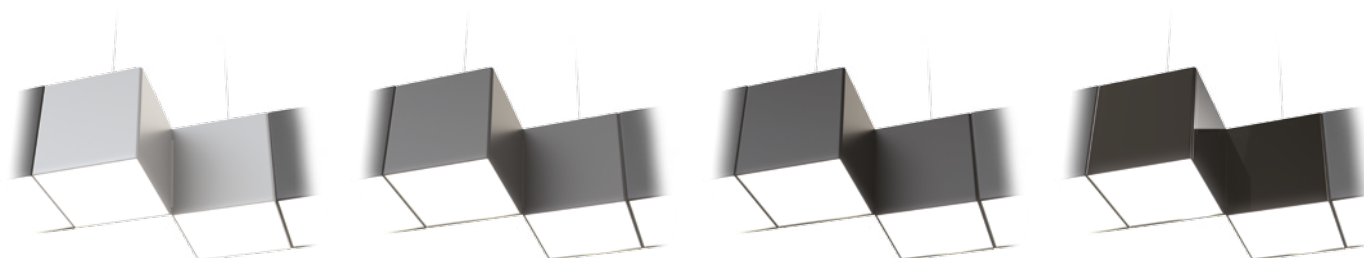

gray matt

dark gray matt

black matt

black gloss

ACCESSORIES



150223.00971

NOISE CONNECT ED 3-pole black electrical connector



150223.00975

NOISE CONNECT DALI 5-pole black electrical connector



150223.00972

NOISE CONNECT mechanical connector black

150220.00976

NOISE CONNECT ED 3-pole power cord

150220.00977

NOISE CONNECT DALI 5-pole power cord

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info available on our website www.flashdq.com

Date of issue: 4-1-2019

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires