



TINO 2.0 LED **NEW**


# TINO 2.0 LED **NEW**

TINO 2.0 is the next addition, reinforcing the RETAIL segment in LUG's portfolio.

The TINO projector family has undergone minor design modifications that allowed for optimizations in both functionality and lighting parameters.

Distinctive structural features of the TINO 2.0 family include:

- Scaled foot between the housing and the power supply
- Rear cover aligned with the edge of the fixture
- ED and DALI driver of the INTRACK type
- Internal ring in the color of the housing
- Internal ring in the color of the fixture housing
- Dedicated segmental glare shields
- Housing color: white/black

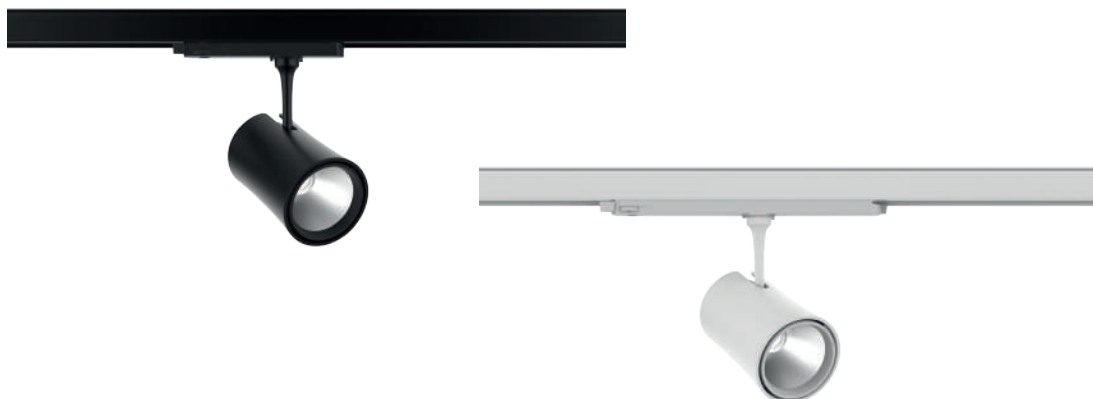



# TINO 2.0 LED



220-240V  
50/60 Hz



IK  
03


IP  
20





LED





|                             |                                                    |
|-----------------------------|----------------------------------------------------|
| power                       | 13 - 36 W                                          |
| lumen luminaire             | 2000 - 5150 lm                                     |
| efficacy                    | up to 162 lm/W (CRI 80)<br>up to 154 lm/W (CRI 90) |
| operating temperature range | 0 ... +35°C                                        |
| colour temperature          | 3000K, 4000K                                       |
| CRI                         | 80, 90                                             |
| IP                          | 20                                                 |
| IK                          | 03                                                 |
| type of equipment           | on/off, DALI                                       |
| body                        | aluminium wtryskiwane                              |
| body colour                 | white, black                                       |
| mounting                    | in 3-phase track, in 3-phase DALI track            |
| dimension                   | 167 88 166 mm                                      |
| weight                      | 0,9 kg                                             |
| lifetime                    | <b>50 000h (L90B10)</b>                            |
| warranty                    | <b>5 years</b>                                     |





020301.SL02.01



020301.SL02.02





020301.SL02.03





020301.SL02.04



ED



DALI



| Code                 | Dimension [mm]<br>L W H | Mounting dimension [mm]<br>L W H | Quantity of luminaires per pallet | Quantity in package | Net weight [kg] |
|----------------------|-------------------------|----------------------------------|-----------------------------------|---------------------|-----------------|
| <b>Typ: STANDARD</b> |                         |                                  |                                   |                     |                 |
| 02030X.XL02.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL01.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL04.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL03.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL06.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL05.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL08.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL07.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| <b>Typ: HI-CRI</b>   |                         |                                  |                                   |                     |                 |
| 02030X.XL10.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL09.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL12.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL11.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL14.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |
| 02030X.XL13.0X       | 167 88 166              | 167 14 28                        | 240                               | 1                   | 0,9             |



# RETAIL

# LIGHTING

LUG Light Factory



[www.luglightfactory.com](http://www.luglightfactory.com).